

# Easton 2 Elongated SmartPak

Elongated Front, Vitreous China Two-Piece Toilet

Elongated  
Front



## FEATURES

- Contemporary design
- 1.6 Gpf / 6.0 Lpf
- TotalFlush™ flushing technology for a reliable flush first time — every time.
- 2" glazed trapway
- Available in White and Bone
- Outstanding protection — The Mansfield® limited lifetime warranty



Model No.	Description	Approx. Wt.
820-45	Elongated front, (1.6 Gpf/6.0 Lpf) two-piece toilet. 12" rough-in. Includes toilet seat, wax ring, floor bolts and bolt caps. Specify color.	75 lbs. (34 kg)



TotalFlush®

# Easton 2 Elongated SmartPak

Elongated Front, Vitreous China Two-Piece Toilet

## FEATURES & UPGRADES

### TotalFlush™ Flushing Technology

This gravity fed toilet features a 1.6 gpf / 6.0 lpf anti-siphon ballcock, durable flush valve and glazed trapway. TotalFlush™ offers a complete flush the first time — every time. Ideal for residential applications or light commercial use.

### 202-1012 Flush Valve

The 202 flapper style flush valve provide 1.6 gpf / 6.0 lpf water conservation efficiency. Plastic construction provided non-corrosive, long-life dependability. Won't rust or corrode.

### 89-1012 Anti-Siphon Ballcock

The 89 anti-siphon ballcock affords efficient tank toilet operation at high or low water pressures. Adjustment screws allows water level adjustment without bending the float rod. Completely non-electrolytic and non-corrosive.




## TECHNICAL INFORMATION

<b>Material</b>	Vitreous China
<b>Water Pressure Range</b>	20 to 80 P.S.I
<b>Flush System</b>	TotalFlush™ Flushing Technology
<b>Water Usage</b>	1.6 Gpf / 6.0 Lpf
<b>Water Surface Area</b>	9-1/4" x 8"
<b>Trap Diameter</b>	2-1/4"
<b>Trap Seal</b>	2"
<b>Rough-in</b>	12"
<b>Warranty</b>	Vitreous China - Limited Lifetime; Tank Trim - Limited One Year

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ANSI/ASME A112.19.2 standards and CAN/CSA B45.0 standards, and other state and local codes.

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

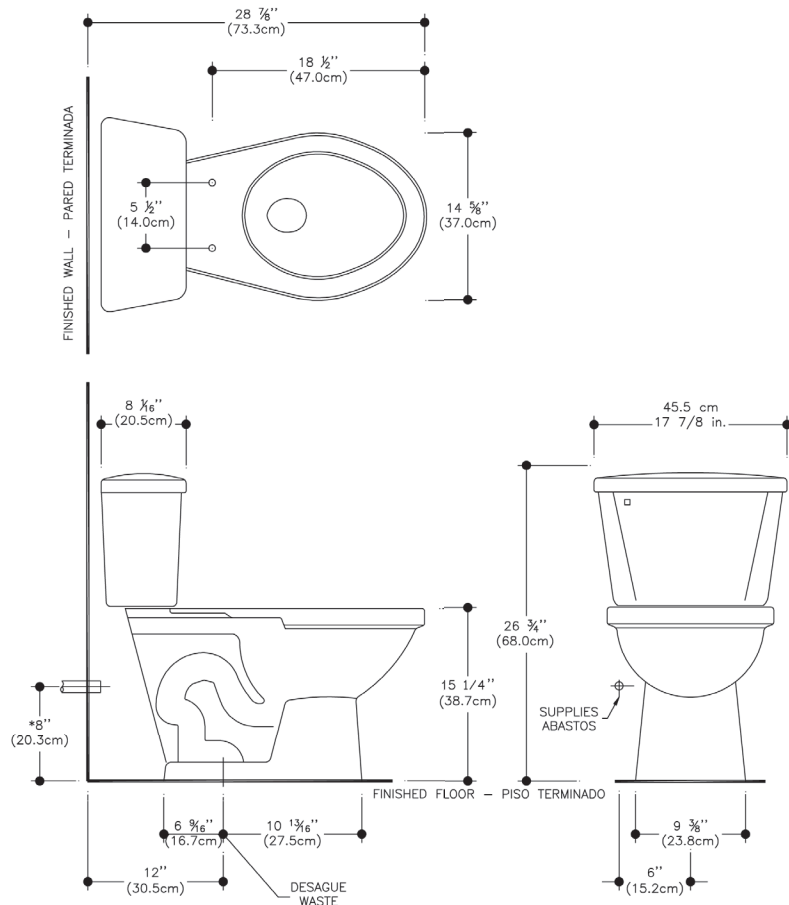

NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2